





OptConnect's first dual-carrier router on the CAT M1 Network

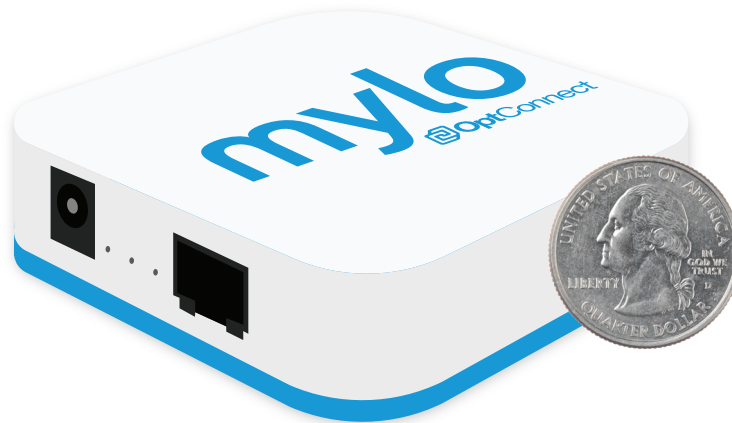

OptConnect mylo

Tenacious Connectivity, Magnetic Personality

| Features | Advantages |
|---|--|
| <ul style="list-style-type: none"> • Plug-n-play Connectivity • Lightweight 2.8 oz • Compact size 79.8 x 79.8 x 19.7 mm • Temp resistance -40c - +85 • Magnetic Base | <ul style="list-style-type: none"> • Dual carrier redundancy   • Better building penetration • Primary network connectivity for POS, ATMs, etc. • Flexible and practical • Modular antenna • Flexible mounting options with integral magnetic base • Delivers speed and wide coverage (Cellular Technology CAT M1) • 5v power • Enables remote device connectivity • Save money, time and improve business efficiency • Always on • Low power consumption 10-15 watts peak • Built-in Firewall – 2.2 • DHCP server for local automatic IP assignment – can assign static IPs <ul style="list-style-type: none"> Public and Private IP modes for local IP assignment NAT with VPN Passthru Domain name addressable • Edge decision making – processing – WRT |
| Additional Features | |
| <ul style="list-style-type: none"> • Cost-effective replacement for landline dial-up circuits or analog cell-phones – Primary connectivity for PLCs, RTUs, POS, ATM solutions • Speed optimized for transactional / sensor data transmission • Full duplex transceiver ethernet port • LED network status indicators • Remotely manageable and upgradeable | |

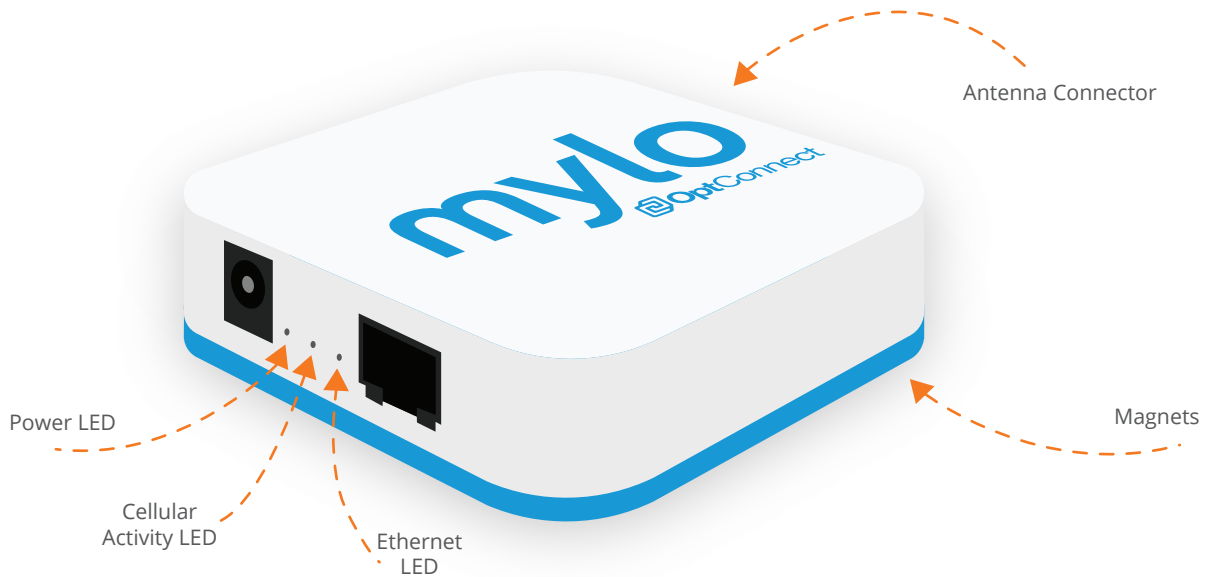

| Wireless WAN | |
|------------------------|--|
| GSM | 2G fallback |
| LTE | LTE-FDD: B1[2100], B2[1900], B3[1800], B4[1700], B5[850], B8[900], B12[700], B13[700], B18[850], B19[850], B20[800], B26[850], B28[700], LTE-TDD: B39[1900] (LTE-M only) |
| WWAN Embedded Module | Quectel-QBG96 |
| SIM Slots | 1 internal 3FF Micro-SIM Slot |
| Antenna Connectors | 1 x 50 Ω SMA (Center pin: female) |
| Ethernet | |
| Ports | 1 |
| Connector | RJ-45 |
| Standard | IEEE 802.3 |
| Physical Layer | 10/100 Base-T |
| Data Rate | 10/100 MBit/s |
| Mode | Full or Half duplex |
| Interface | Auto MDI/MDIX |
| Management | |
| Fully Managed Service | Logistics, fulfillment, 24x7 support, APIs, OptConnect Summit |
| Processor and Memory | Logistics, fulfillment, 24x7 support, APIs, OptConnect Summit |
| Protocol Support | HTTP, HTTPS, FTP, SSL |
| Power | |
| Input | 5 VDC (power supply with barrel connector included) |
| Consumption | Typical: 3.5 W; Max: 15 W |
| General | |
| LEDs | Power On, LAN Connection, WWAN Service |
| Relative Humidity | 5% to 95% (non-condensing) |
| Approvals | |
| GSM/CDMA | Verizon ODI, PTCRB |
| Carrier Certifications | Verizon, AT&T, others |

Need more information?

Contact D&S Vending Inc., an OptConnect Certified Partner, at 1-800-445-8363 or jasongreene9@att.net