

PN: CL-TL-K-X

Thank you for purchasing the CLEANLIFE® EzConnect™ LED Universal Light Kit for Trucks & Vans.



CAUTION:
TURN OFF VEHICLE COMPLETELY AND REMOVE KEYS FROM THE IGNITION BEFORE INSTALLING!

Please follow the following steps for installation.

CLEANLIFE® EzConnect™ LED
Universal Light Kit for Trucks & Vans

Tools required for installation (not included):

1. Phillips screw driver
2. Wire stripper

INSTRUCTIONS FOR INSTALLING

1-800-316-2532 www.cleanlifeled.com

1 Remove contents from box


2 Verify that the package contains all the components shown below.

	42" Truck Light Kit	21" Truck Light Kit	10.5" Truck Light Kit
	1 Included	2 Included	3 Included
	1 Included	2 Included	3 Included
	2 Included		
	4 Sets Included	4 Sets Included	6 Sets Included

3 Turn off vehicle completely and remove keys from the ignition

4 Using the 3M double sided tape, temporarily affix the CLEANLIFE® EzConnect™ LED Light Bar in the desired position. Then, permanently affix the CLEANLIFE® EzConnect™ LED Light Bar using the included plastic brackets and screws, see figure 1.


Figure 1

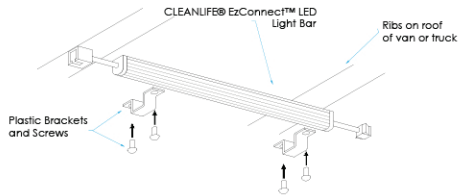

WARNING: CLEANLIFE® EzConnect™ LED Light Bars must be permanently affixed using the included mounting hardware to be covered under the warranty.

5 Connect CLEANLIFE® EzConnect™ DC Extension Cable to CLEANLIFE® EzConnect™ LED Light Bar, see figure 2.


Figure 2

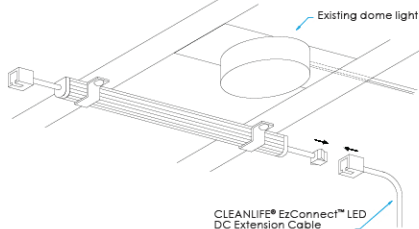

6 If the vehicle has an existing dome light, the CLEANLIFE® EzConnect™ DC Extension Cable may be spliced into the wires powering the dome light.

Cut off one connector on one end of the CLEANLIFE® EzConnect™ DC Extension Cable and strip the wires. Then cut and strip the wires powering the dome light. Using the supplied end connectors, join the positive DC wire to the red wire of the CLEANLIFE® EzConnect™ DC Extension Cable and join the negative DC wire to the black wire of the CLEANLIFE® EzConnect™ DC Extension Cable, see figure 3.


Figure 3

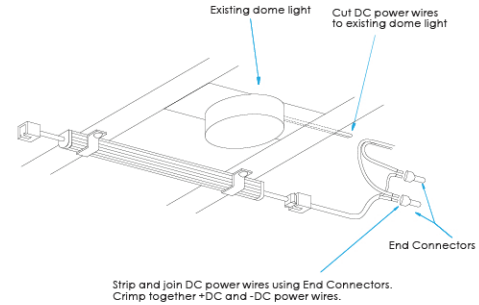

7 If the vehicle does not have dome light, the CLEANLIFE® EzConnect™ DC Extension Cable may be spliced into another location, for example in the front of the vehicle.

8 To attach an additional CLEANLIFE® EzConnect™ LED Light Bar, install the second CLEANLIFE® EzConnect™ LED Light Bar as shown in step 4. Then connect the CLEANLIFE® EzConnect™ LED Light Bar using the CLEANLIFE® EzConnect™ DC Extension Cable. Then connect the other end of the CLEANLIFE® EzConnect™ DC Extension Cable to the second CLEANLIFE® EzConnect™ LED Light Bar, see figure 4

Figure 4

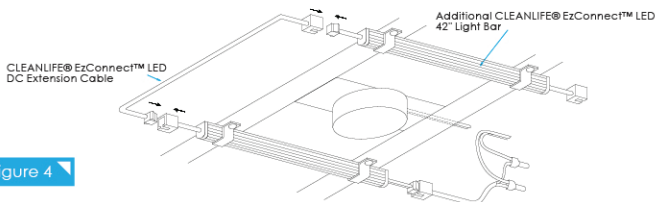

9 See figures 5 and 6 for suggested arrangements for three and four CLEANLIFE® EzConnect™ LED Light Bars.

Figure 5


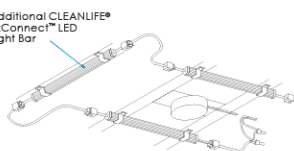


Figure 6

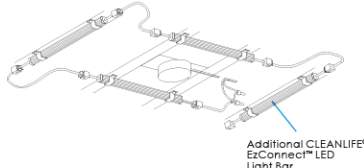

5-YEAR LIMITED WARRANTY

CLEANLIFE® EzConnect™ LED Universal Light Kit for Trucks & Vans are warranted to be free and clear of defects in materials and workmanship for a period of five years from the date of purchase. This warranty covers defects in manufacturing discovered while using the product as recommended by the manufacturer and does not apply to failures caused by acts of God or as a result of any abuse, misuse, abnormal use, or use in violation of any applicable standard, code, or instructions for use in installations.

The foregoing warranty constitutes the sole and exclusive remedy of the purchaser and the sole liability of CLEANLIFE ENERGY of CLEANLIFE® EzConnect™ LED Universal Light Kit for Trucks & Vans. NO WARRANTIES OF PERFORMANCE, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE IS MADE EXPRESSLY, ORALLY, OR IMPLICITLY BY CLEANLIFE ENERGY. In no event shall CLEANLIFE ENERGY be liable for any other costs or damages, including lost profits, indirect, incidental, consequential, special, or punitive damages.

If a CLEANLIFE® EzConnect™ LED Universal Light Kit for Trucks & Vans fails due to a defect covered by this warranty, CLEANLIFE ENERGY will, at its option, either replace the product or provide a credit equal to the current price CLEANLIFE ENERGY charges for the product. To make a warranty claim, retain the failed products, and notify a CLEANLIFE ENERGY sales representative in writing within thirty (30) days of the failure.



DO NOT USE WITH DIMMERS
RISK OF ELECTRIC SHOCK- USE IN DRY LOCATIONS ONLY.



Lamps must be operated within an ambient fixture temperature of -22F (-30c) and 113F (45c) to comply with all safety and warranty regulations.

For more information, please contact us at:

CLEANLIFE® LED
2165 East 33rd Street
Cleveland, Ohio 44115
1-800-316-2532
www.cleanlifeled.com